



HANSA


Installation and maintenance guide



4-9



10,12,
13




11-12



14-19



20



21




22



5542 2203 / 4071 2203



EN 817
I (ISO 3822)
50 - 1000 kPa
0.08 l/s (300 kPa w/Controller)
max. +70°C

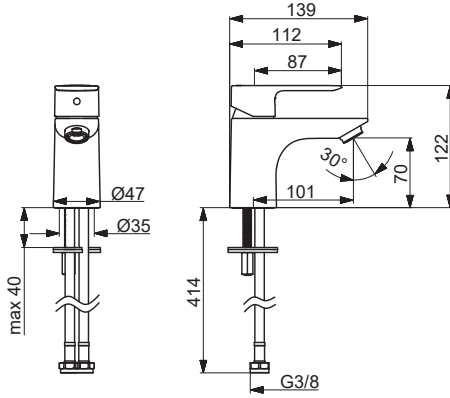

mpi.hansa.com/55422203

5540 2203 (00006) / 4070 2203 (00006)


EN 817
I (ISO 3822)
50 - 1000 kPa
0.08 l/s (300 kPa w/Controller)
max. +70°C

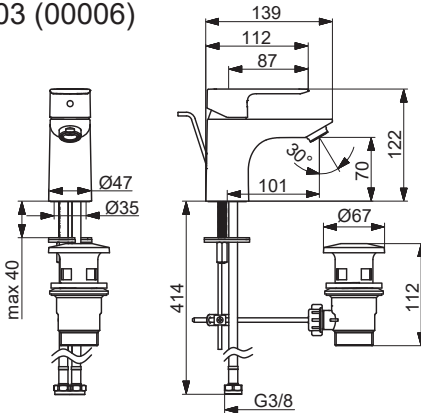

mpi.hansa.com/55402203

5552 2203 / 4077 2203

EN 817
I (ISO 3822)
50 - 1000 kPa
0.08 l/s (300 kPa w/Controller)
max. +70°C


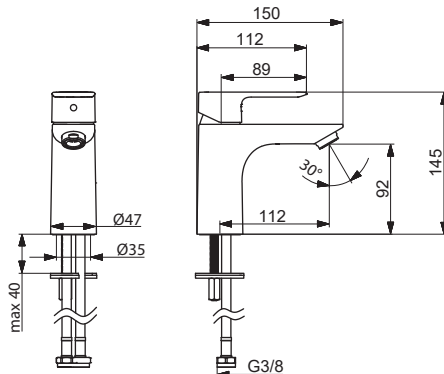


mpi.hansa.com/55522203



5550 2203 (00006) / 4076 2203 (00006)


EN 817
 I (ISO 3822)
 50 - 1000 kPa
 0.08 l/s (300 kPa w/Controller)
 max. +70°C

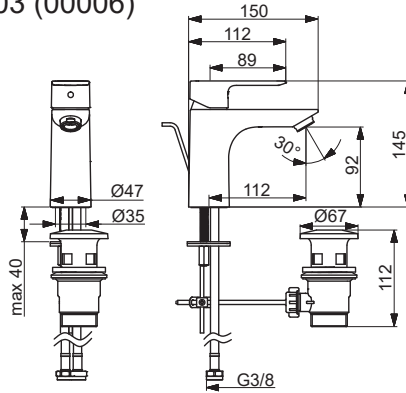

mpi.hansa.com/55502203

5554 2203 / 4078 2203


EN 817
 I (ISO 3822)
 50 - 1000 kPa
 0.08 l/s (300 kPa w/Controller)
 max. +70°C

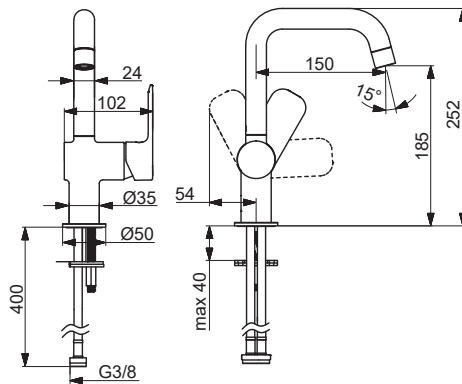

mpi.hansa.com/55542203

5555 2203 / 4079 2203

EN 817
 I (ISO 3822)
 50 - 1000 kPa
 0.08 l/s (300 kPa w/Controller)
 max. +70°C


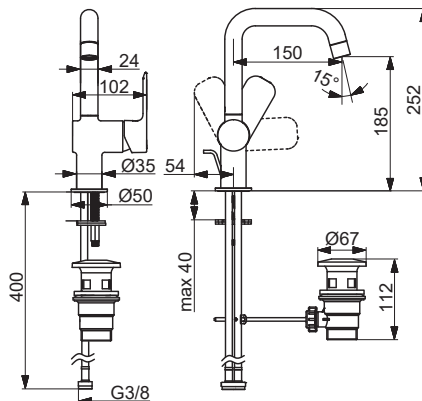


mpi.hansa.com/55552203



5547 2203 / 4074 2203


EN 817
 I (ISO 3822)
 50 - 1000 kPa
 0.08 l/s (300 kPa w/Controller)
 max. +70°C

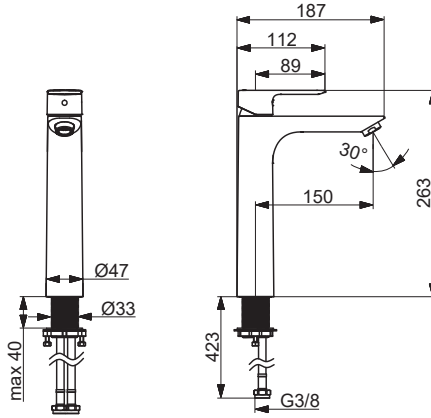

mpi.hansa.com/55472203

5548 2203 / 4075 2203


EN 817
 I (ISO 3822)
 50 - 1000 kPa
 0.18 l/s (300 kPa)
 max. +70°C

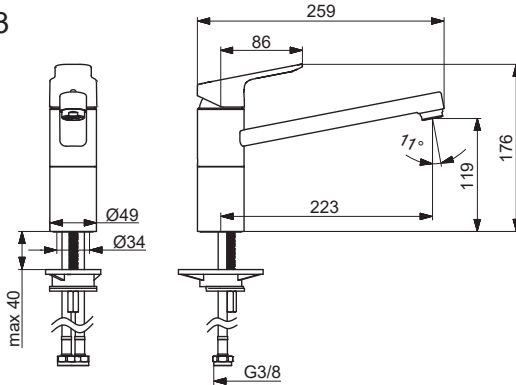

mpi.hansa.com/55482203

5556 2203 / 4080 2203

EN 817
 I (ISO 3822)
 50 - 1000 kPa
 0.18 l/s (300 kPa)
 max. +70°C

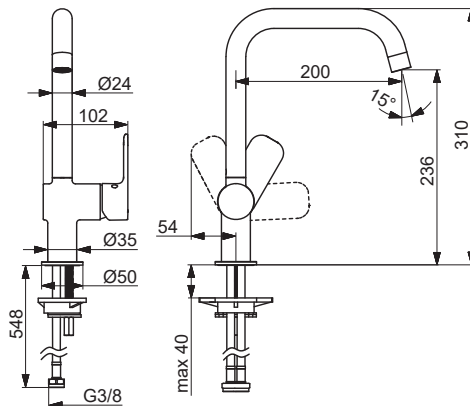


mpi.hansa.com/55562203



5545 0103 / 4073 0103


EN 817
 I (ISO 3822)
 50 - 1000 kPa
 0.21 l/s (300 kPa)
 max. +80°C

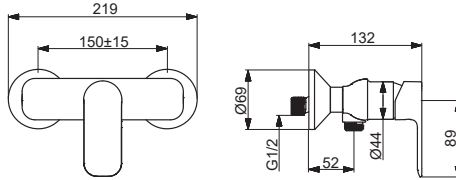

mpi.hansa.com/55450103

5544 2103 / 4072 2103



EN 817
 I (ISO 3822)
 50 - 1000 kPa
 0.36 / 0.22 l/s (300 kPa)
 max. +80°C

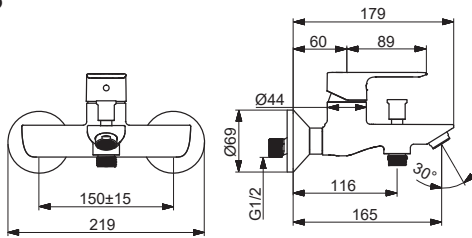

mpi.hansa.com/55442103

5538 0130 / 4089 0130

EN 1112, 1113
 50 - 500 kPa
 0.16 / 0.22 l/s (300 kPa)
 max. +65°C


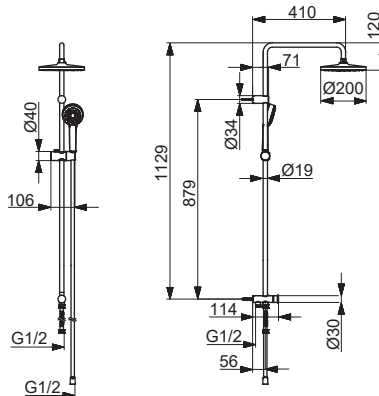


mpi.hansa.com/55380130



5578 0113 / 4084 0113



EN 1112, EN 1113
50 - 500 kPa
0.28 l/s (300 kPa)
max. +65°C

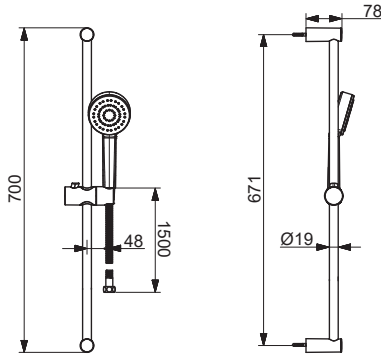

mpi.hansa.com/55780113

5578 0133 / 4085 0133


EN 1112, EN 1113
50 - 500 kPa
0.19 l/s (300 kPa)
max. +65°C

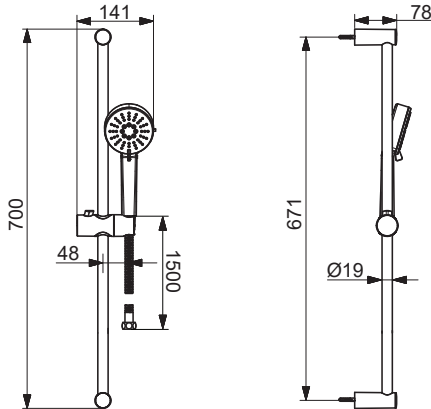

mpi.hansa.com/55780133

5515 0131 / 4086 0131

EN 1111
I (ISO 3822)
100 - 1000 kPa
0.16 l/s (Eco)
0.19 l/s (300 kPa)
max. +65°C

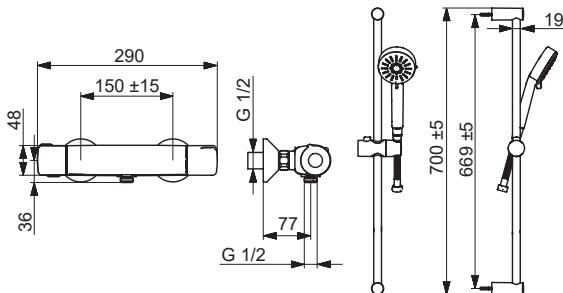


mpi.hansa.com/55150131



5535 0110 / 4088 0110


EN 1111, EN 1112, EN 1113
 100 - 1000 kPa
 0.18 / 0.24 l/s (300 kPa)
 max. +65°C

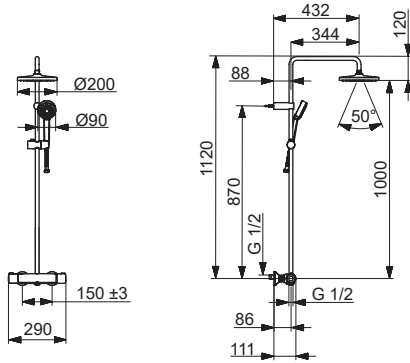





mpi.hansa.com/55350110

5516 2131 / 4087 2131


EN 1111
 II (ISO 3822)
 100 - 1000 kPa
 0.16 l/s (Eco)
 0.34 / 0.19 l/s (300 kPa)
 max. +65°C




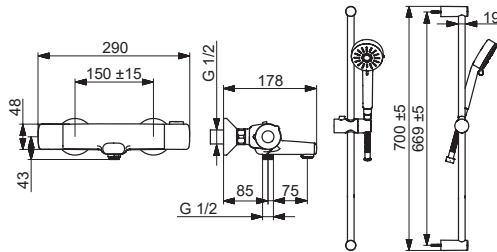


mpi.hansa.com/55162131








1 A

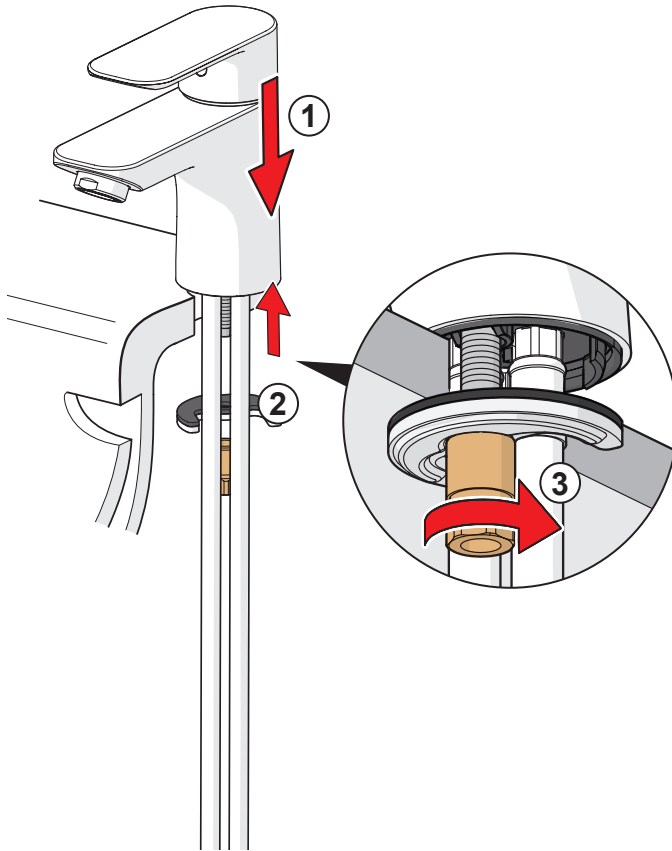





1 **B**

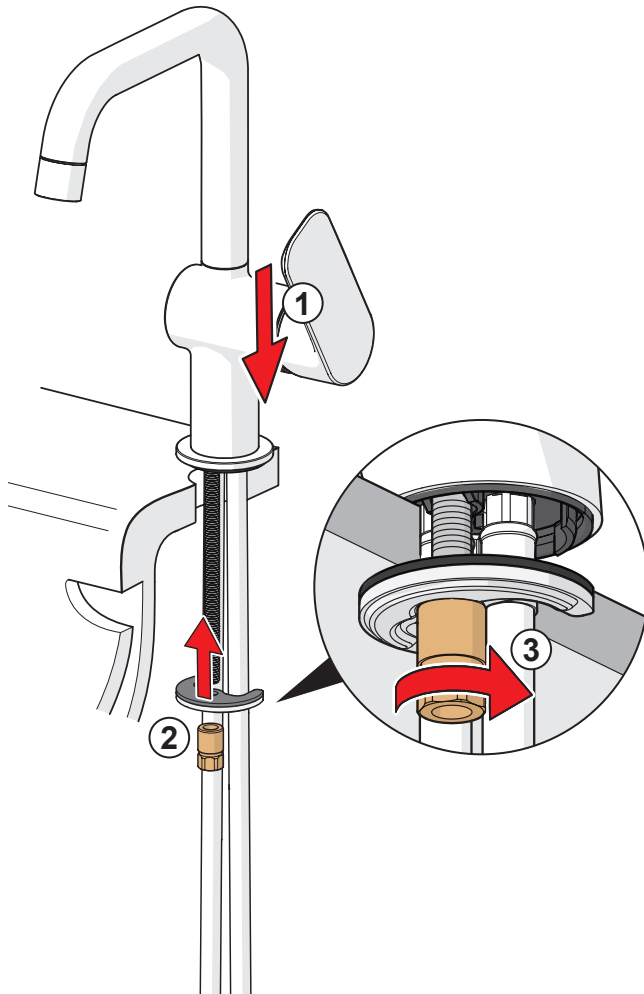








1 **C**



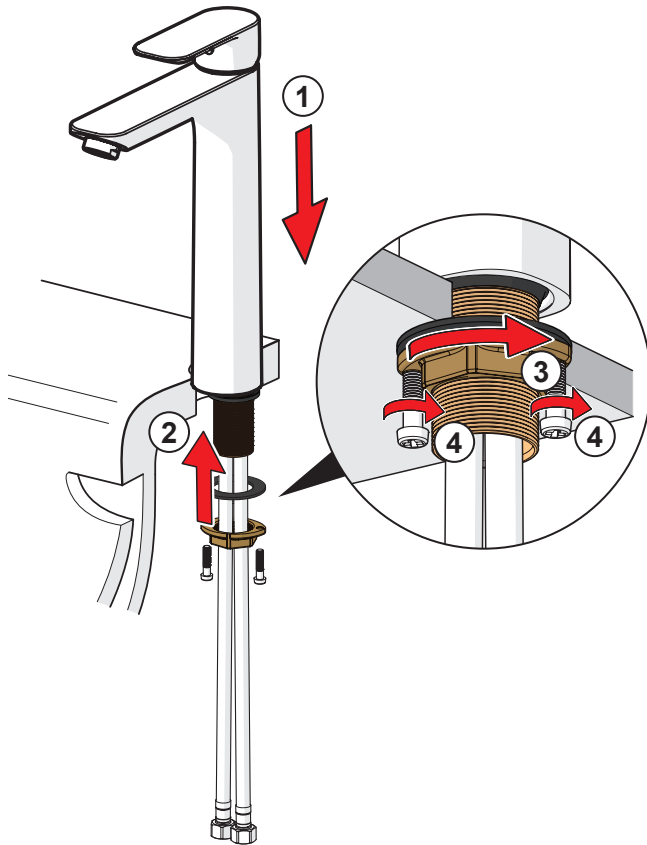













①


2

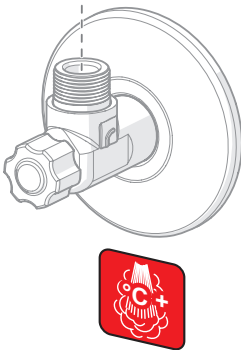



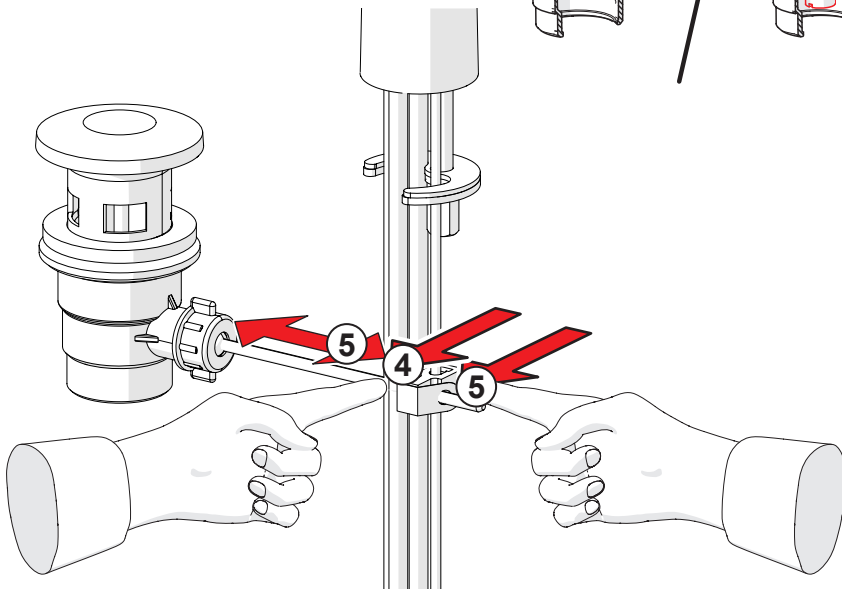
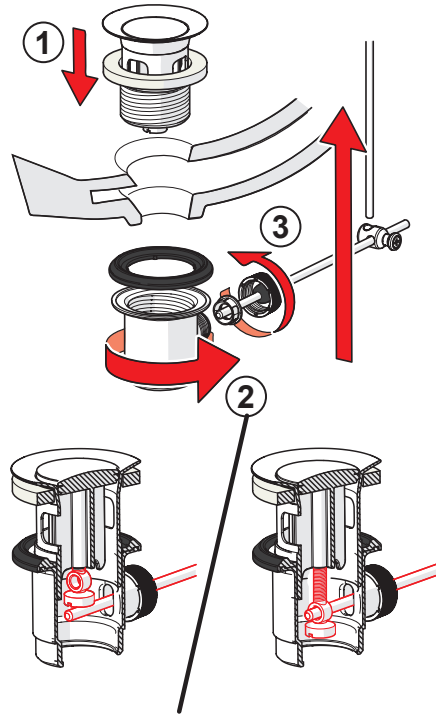




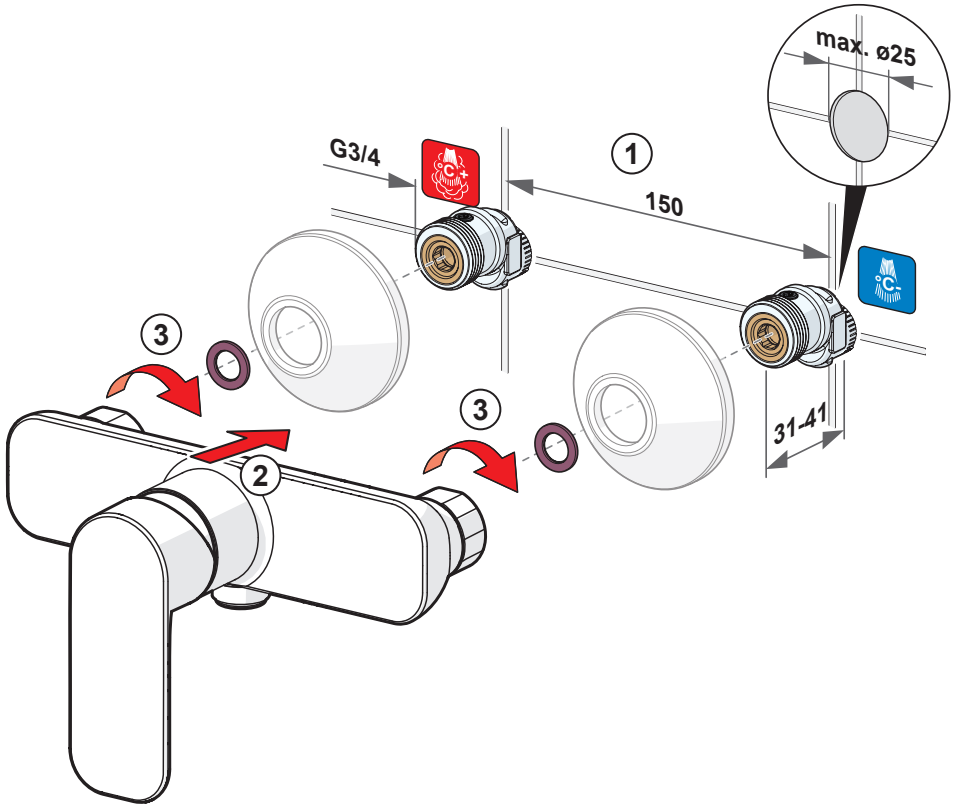
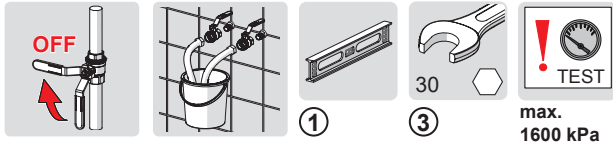


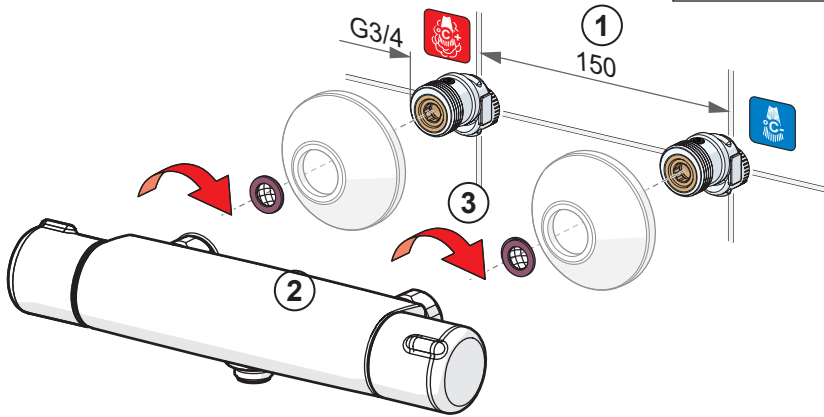




1 3

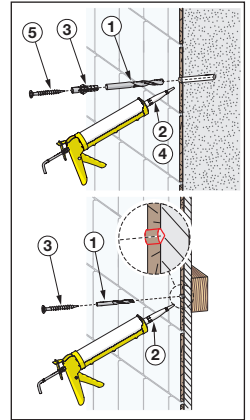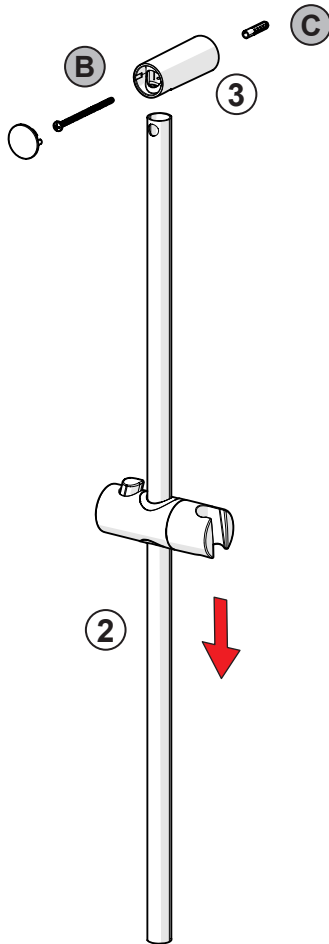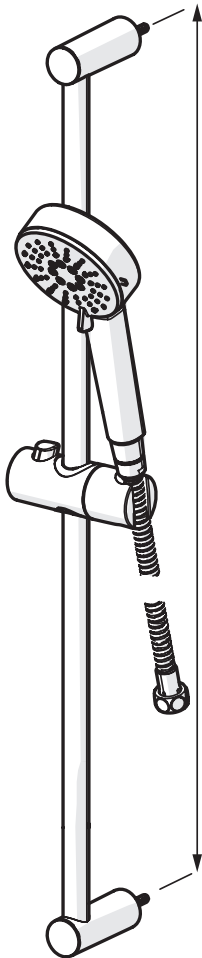

- A**  x 1
- B**  x 1
- C**  x 2








2.5


②



22






③

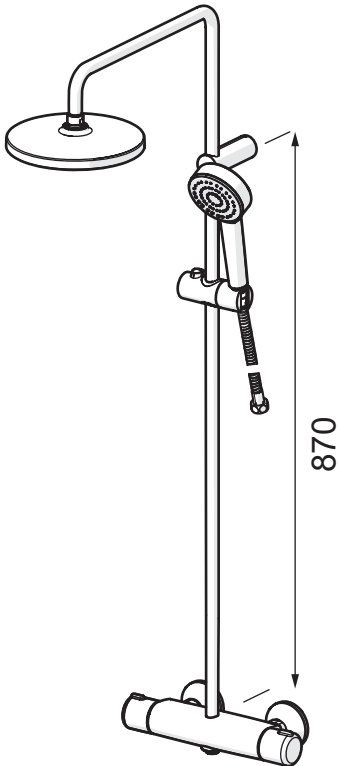
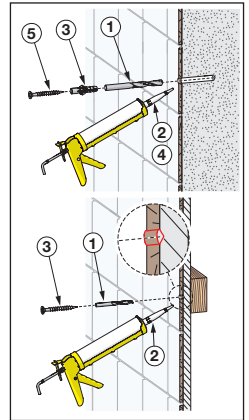

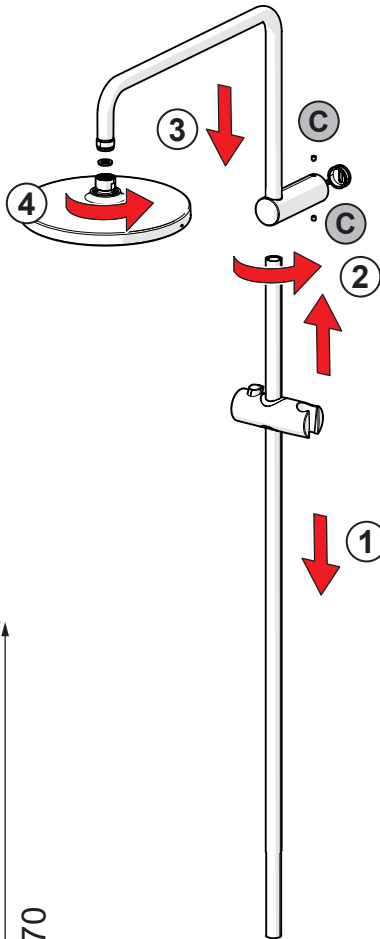








5

6


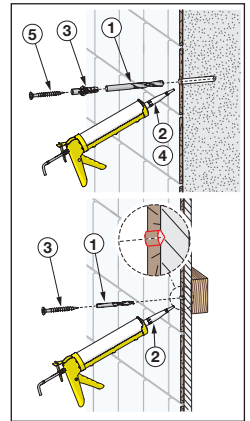
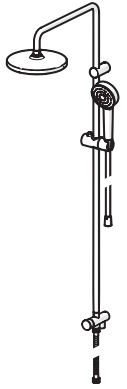
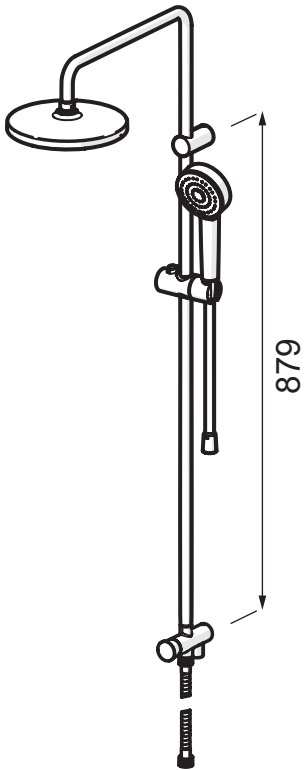
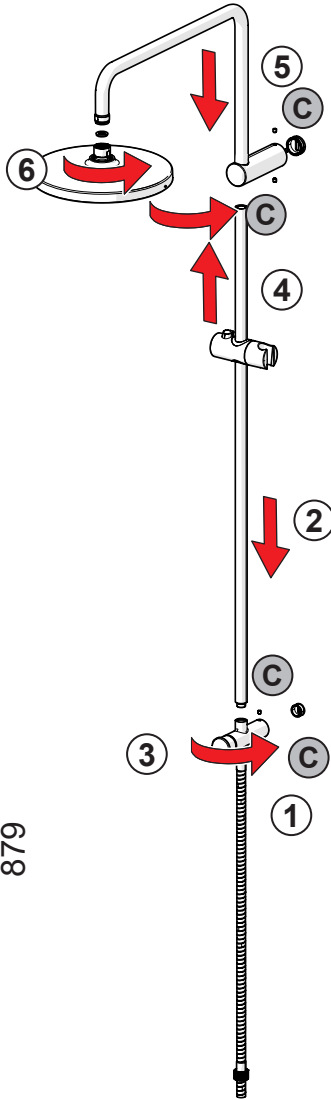


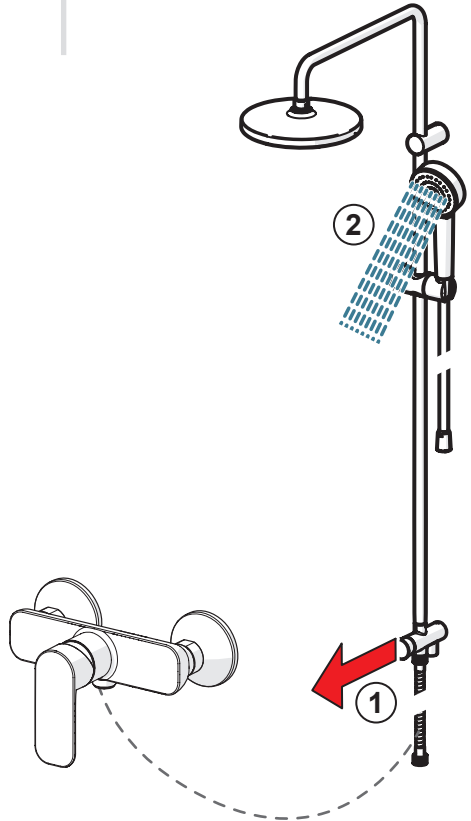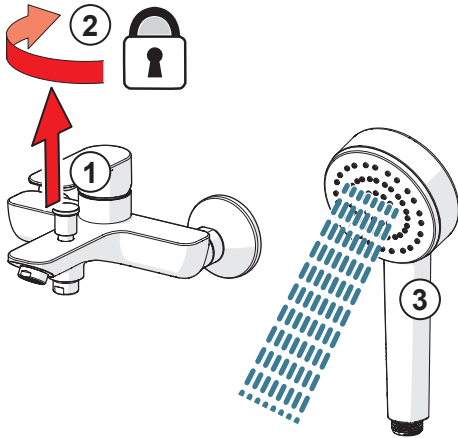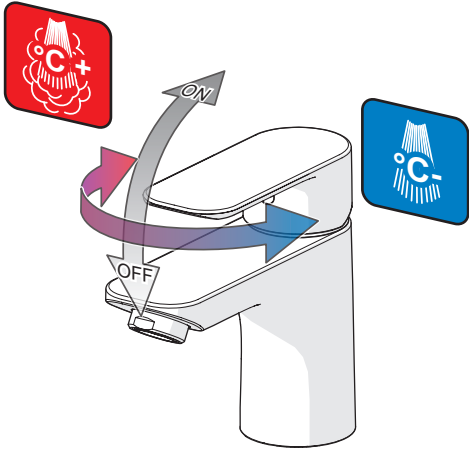

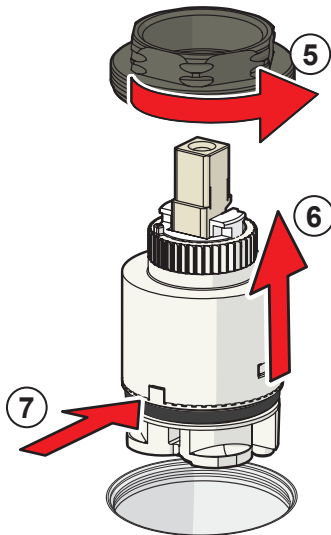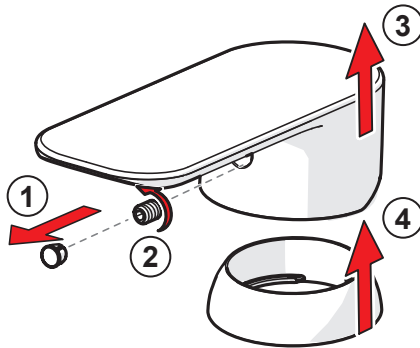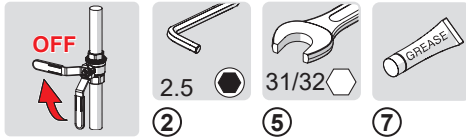



22

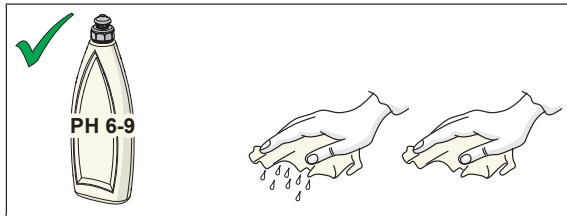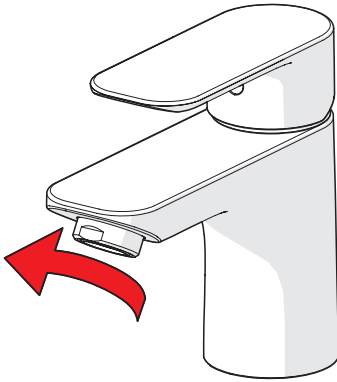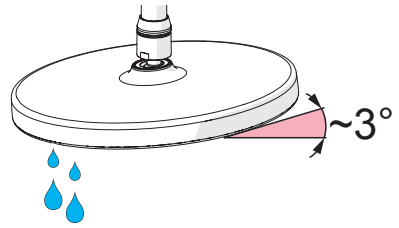

cleaning.hansa.com

Oras Group is a powerful European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe. The company's mission is to make the use of water easy and sustainable and its vision is to become the European leader of advanced sanitary fittings. Oras Group has two strong brands: Oras and Hansa.

The Group's head office is located in Rauma, Finland, and the Group has three manufacturing sites: Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland). Oras Group employs approximately 1,200 people in twenty countries. Oras Group is owned by Oras Invest, a family company and an industrial owner.

HANSA Armaturen GmbH
P. O. BOX 81 02 40
D-70519 Stuttgart
Sigmaringer Strasse 107
D-70567 Stuttgart
Tel.: +49 711 16 14 0
Fax: +49 711 16 14 368
info@hansa.de
www.hansa.com

